


## Primelco QuickConnect Touchpanel PC QCT-Series

Primelco entwickelte eine Touchpanel-Serie optimiert für Anwendungen in der Gebäudeautomatisation. Ihre Vorteile:

- ▣ **Minimieren Sie Ihre Montagekosten:** Schnelle, kostengünstige Montage an einer Standard Gr-1 Wanddose
- ▣ **Schaffen Sie Sicherheit:** Keine sichtbaren Kabel oder zugängliche Schnittstellen! Verriegelbar: Dank QuickLock-Mechanismus vor Diebstahl geschützt.
- ▣ **Simple:** Keine zusätzliche Wandhalterung oder Unterputzdose notwendig. Wandbündige Montage. Demontierbar ohne Instandstellungsarbeiten!
- ▣ **Erweitern Sie Ihr System:** In Größen 7" und 10.1" mit Betriebssystem Linux, Windows10IoT und Android (FullyKiosk+) erhältlich!
- ▣ **Flexibel im Betrieb:** Ob per PoE, 230VA oder DC betrieben entscheiden Sie selbst dank wechselbaren Wandadapter
- ▣ **Ready-to-use:** Vorinstallierter und lizenzierter Kiosk-Browser (FullyKiosk+) bei Android Betriebssystem ermöglicht schnelle und sichere Inbetriebnahme und Remotemanagement
- ▣ **Design:** In der Schweiz entwickelt und produziert. Gehäuse aus vollem Aluminium, hochwertig und langlebig!
- ▣ **Service und Support** in und aus der Schweiz



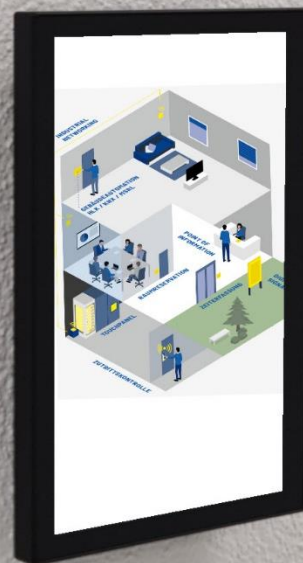

### Technical specification


		7,0"	10,1"
Housing	Material	Aluminum	
	Color	Black painted Trend9	
	Weight	Approx. 1.1 KG	Approx. 1.3 KG
	Dimensions (LxHxW)	115 x 182 x 36 mm	163 x 241 x 36 mm
	Mounting Options	Primelco Quick Connect Mounting system	
	IP Grade	Front IP54 / Back IP41 (wall mounted)	
Panel and Touch	Display ratio	16:9 LCD-TFT	16:10 LCD-TFT
	Resolution	1024x600	1280x800
	Brightness typ.	400 nits (cd/m2)	400 nits (cd/m2)
	Contrast Ratio	800:1	800:1
	Backlight	LED	LED
	Viewing angle.	85/85	89/89
	Touchscreen	Projected capacitive, Multi-touch	
	Surface hardness	Hard Coated	
	Structure surface	Matt, anti-glare	
	RFID (Option)	Standard	n/a
System	Processor	INTEL® E3930 dual-core (Optional E3940 quad-core, 8GB RAM,128GB eMMC)	
	Supports OS	Windows 10 IoT, Android 6.0 KIOSK Browser, Linux	
	System Memory	1x LDDR4 on board 4GB (8GB on request)	
	Storage	1x eMMC 64 GB (128GB on request)	
	Ethernet	1GbE (PoE option available)	
	Power Input	14 to 28VDC or PoE 802.3at (25W) depends on Quick Connect Adapter	
	Power Consumption	Approx. 12Watt, max. 15Watt	Approx. 15Watt, max. 20Watt
I/O Connectors	n/a		
Environmental	Usability	Indoor 24/7	
	Operating Temperature	0 to 40°C	
	Storage Temperature	-5 to 60 °C	
	Operating Humidity	90% RH no dew condensation	
	IP Grade	Front IP54 / Back IP30 (wall mounted)	
	Certification	RoHS, CE (Conformity)	
Order Information (P/N)	We refer to price list PRlcontrol-2		



## Wie (ent)sichere ich ein QCT-Terminal:

Benützen Sie 2.5mm INBUS um Terminal mit der Wandhalterung zu sichern

- Uhrzeigersinn: entsperre Terminal
- Gegenuhrzeigersinn: sichere Terminal

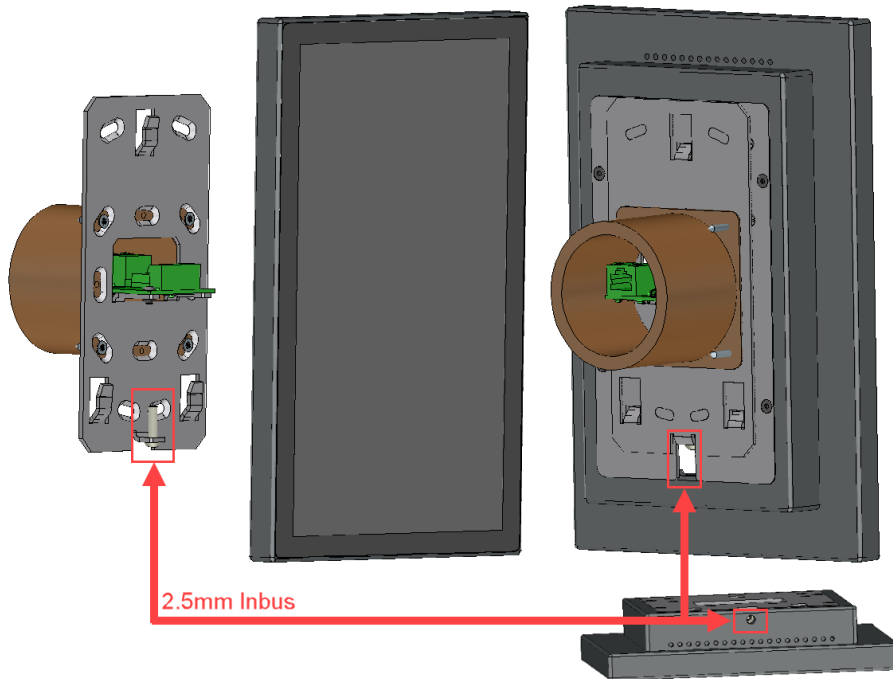



## Kiosk-Brower FullyKiosk+

Jedes QCT mit Betriebssystem Android hat die Vollversion FullyKiosk+ Browser vorinstalliert und lizenziert.

Eine ausführliche Beschreibung der Funktionsweise finden Sie unter:

<https://www.fully-kiosk.com/de/>

### Main features

- Show websites
- Lockdown or configure numerous web content features
- Handle PDF, Videos and other contents
- Universal Launcher
- Customizable Toolbars and Appearance
- Configurable browsing controls
- Auto reload website
- Configure your device
- Screensaver
- Kiosk Mode
- Website Integration
- Remote Admin
- Daily Usage Statistics
- Recover the app

### Settings

Remote Administration (PLUS)	
Access Fully remotely from web browser in local network or worldwide	
Enable Remote Administration	Show info, configure and control Fully app remotely
Remote Admin Password	Password needed for remote admin site and for adding the device to Fully C
Remote Admin from Local Network	Enable remote admin and REST interface in the local network
Enable File Management on Remote Admin	Allow listing and downloading local files using remote admin This option can
Enable Screenshot on Remote Admin	Allow getting a screenshot on remote admin This option can't be changed fr
Enable Camshot on Remote Admin	Allow getting a camshot on remote admin (requires Motion Detection) This c
Remote Admin from Fully Cloud	Manage the device in Fully Cloud

### Settings

Kiosk Mode (PLUS)	
Lockdown device, prevent from accessing other apps, settings or buttons, set PIN, single app mode	
Enable Kiosk Mode	<input type="checkbox"/>
Lockdown device with exit gesture and PIN This option can't be changed from Remote Admin as kiosk mode changes require user input on the device	
Kiosk Exit Gesture	Select the gesture to show the PIN dialog
Swipe from Left or Long Press Back (in Fully)	
Kiosk Mode PIN	*****
PIN needed to exit the Kiosk Mode, default: 1234	
Wifi/Settings PIN	
Set a special PIN for wifi or settings access only	
Disable Status Bar	<input checked="" type="checkbox"/>
Lock status bar and system settings access	
Disable Volume Buttons	<input checked="" type="checkbox"/>
Lock volume level in Kiosk Mode	
Limit the Volume Level	
Limit the volume on all audio streams to this maximum in percent, empty for disable	
Disable Power Button	<input checked="" type="checkbox"/>
Lock the power button in Kiosk Mode	
Disable Home Button	<input checked="" type="checkbox"/>
Lock the home button and auto-run Fully in Kiosk Mode on boot	
Disable Other Apps	<input checked="" type="checkbox"/>
Block apps not intentionally started by Fully	
Advanced Kiosk Protection	<input checked="" type="checkbox"/>
Enable advanced protection against starting other apps	
App Whitelist	
Allow selected apps or activities to go to foreground, one package/component name per line, may use * wildcard	
App Blacklist	
Always block selected apps or activities, one package/component name per line, may use * wildcard	
Single App Mode	
Auto-run an app with full kiosk mode protection	
Disable Notifications	<input type="checkbox"/>
Block all notifications from other apps	




**Mechanische Zeichnung:**



## PC Primelco QuickConnect Touchpanel Series - QCT

Primelco a développé une série d'écrans tactiles optimisés pour des applications dans l'automatisation des bâtiments. Vos avantages :

- ▣ **Minimisez vos coûts de montage** : montage rapide et peu coûteux sur une boîte murale standard Gr-1
- ▣ **Créez la sécurité** : pas de câbles visibles ni d'interfaces accessibles ! Verrouillable : protégé contre le vol grâce au mécanisme QuickLock
- ▣ **Simple** : pas besoin de support mural ou de boîte d'encastrement supplémentaire. Montage au ras du mur. Démontable sans travaux de remise en état
- ▣ **Élargissez votre système** : disponible en tailles 7" et 10.1" avec système d'exploitation Linux, Windows10IoT et Android (FullyKiosk)
- ▣ **Fonctionnement flexible** : vous décidez vous-même si vous souhaitez l'utiliser en PoE, 230VA ou DC grâce à l'adaptateur mural interchangeable
- ▣ **Prêt à l'emploi** : le navigateur de kiosque préinstallé et sous licence (FullyKiosk+) pour le système d'exploitation Android permet une mise en service et une gestion à distance rapides et sûres
- ▣ **Design** : développé et produit en Suisse. Boîtier en aluminium plein, de haute qualité et durable
- ▣ **Service et assistance** en et depuis la Suisse

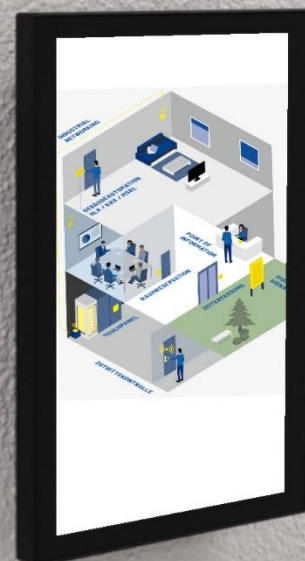



### Caractéristiques techniques

		7,0"	10,1"
Boîtier	Matériau	Aluminium	
	Couleur	Peinture noire Epoxy Trend9	
	Poids	Approx. 1.1 KG	Approx. 1.3 KG
	Dimensions max. (LxHxP) [mm]	115 x 182 x 36 mm	163 x 241 x 36 mm
	Options de montage	Primelco système de montage rapide	
	Indice de protection	Face avant IP54 / Face arrière IP41 (montage mural)	
Écran tactile	Rapport hauteur/largeur	16:9 LCD-TFT	16:10 LCD-TFT
	Résolution	1024x600	1280x800
	Luminosité [cd/m <sup>2</sup> ]	400 nits	400 nits
	Rapport de contraste	800:1	800:1
	Rétro-éclairage	LED	LED
	Angle de vision	85/85	89/89
	Écran tactile	Capacitif projeté, Multi-touch	
	Dureté de la surface	Revêtement dur	
	Surface de la structure	Mat, anti-reflet	
	RFID (Option)	Standard	n/a
Système	Processeur	INTEL® E3930 double cœur (En option E3940 quadruple cœur, 8GB RAM, 128GB eMMC)	
	Système d'exploitation	Windows 10 IoT, Android 6.0 KIOSK Browser, Linux	
	Mémoire vive	1x LDDR4 intégrée 4GB (8GB sur demande)	
	Capacité	1x eMMC 64 GB (128GB sur demande)	
	Ethernet	1GbE (PoE possible en option)	
	Alimentation	14 to 28VDC ou PoE 802.3at (25W) dépend de l'adaptateur de connexion rapide	
	Consommation électrique	Approx. 12Watt, max. 15Watt	Approx. 15Watt, max. 20Watt
Connecteurs Entrées/Sorties	n/a		
Environmental	Utilisation	Intérieur 24/7	
	Température d'utilisation	0 à 40°C	
	Température de stockage	-5 à 60 °C	
	Humidité en service	90% HR sans condensation	
	Indice de protection	Face avant IP54 / Face arrière IP30 (montage mural)	
	Certification	RoHS, CE (Conformité)	
Informations sur la commande (P/N)	Se référer à la liste des prix PRIcontrol-II		




**Comment (dé)verrouiller le terminal :**

Utilisez le connecteur INBUS de 2,5 mm sur la face inférieure pour verrouiller le terminal sur l'adaptateur de montage mural.

Dans le sens des aiguilles d'une montre : déverrouiller le terminal

Dans le sens inverse des aiguilles d'une montre : verrouillage du terminal

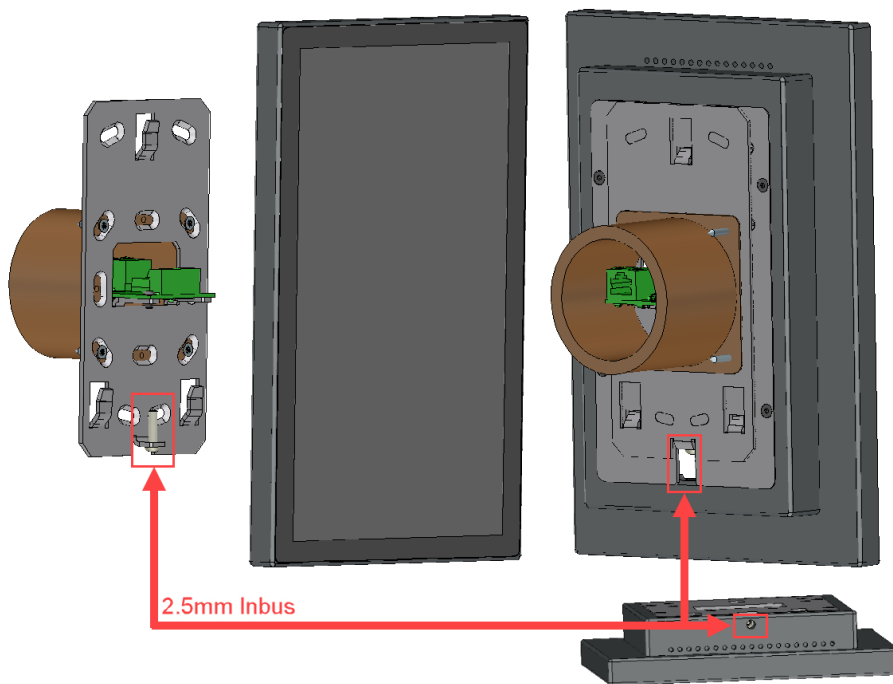





## Kiosque-Brower FullyKiosk+

Chaque version de QCT Android a un Brower FullyKiosk+ pré-installé et licencié.  
Une description complète de toutes les fonctionnalités est disponible sur le site :

<https://www.fully-kiosk.com/de/>

### Caractéristiques principales :

- Afficher les sites web
- Verrouiller ou configurer de nombreuses fonctions de contenu web
- Gestion des PDF, des vidéos et d'autres contenus
- Lanceur universel
- Barres d'outils et apparence personnalisables
- Contrôles de navigation configurables
- Rechargement automatique du site web
- Statistiques d'utilisation quotidienne
- Configurez votre appareil
- Economiseur d'écran
- Mode kiosque
- Intégration d'un site web
- Administration à distance
- Récupérer l'application

### Settings

Remote Administration (PLUS)	
Access Fully remotely from web browser in local network or worldwide	
Enable Remote Administration	Show info, configure and control Fully app remotely
Remote Admin Password	Password needed for remote admin site and for adding the device to Fully Cloud
Remote Admin from Local Network	Enable remote admin and REST interface in the local network
Enable File Management on Remote Admin	Allow listing and downloading local files using remote admin This option can't be changed from Remote Admin
Enable Screenshot on Remote Admin	Allow getting a screenshot on remote admin This option can't be changed from Remote Admin
Enable Camshot on Remote Admin	Allow getting a camshot on remote admin (requires Motion Detection) This option can't be changed from Remote Admin
Remote Admin from Fully Cloud	Manage the device in Fully Cloud

### Settings

Kiosk Mode (PLUS)	
Lockdown device, prevent from accessing other apps, settings or buttons, set PIN, single app mode	
Enable Kiosk Mode	Lockdown device with exit gesture and PIN This option can't be changed from Remote Admin as kiosk mode changes require user input on the device <input type="checkbox"/>
Kiosk Exit Gesture	Select the gesture to show the PIN dialog
Swipe from Left or Long Press Back (in Fully)	
Kiosk Mode PIN	PIN needed to exit the Kiosk Mode, default: 1234 *****
Wifi/Settings PIN	
Set a special PIN for wifi or settings access only	
Disable Status Bar	Lock status bar and system settings access <input checked="" type="checkbox"/>
Disable Volume Buttons	Lock volume level in Kiosk Mode <input checked="" type="checkbox"/>
Limit the Volume Level	Limit the volume on all audio streams to this maximum in percent, empty for disable
Disable Power Button	Lock the power button in Kiosk Mode <input checked="" type="checkbox"/>
Disable Home Button	Lock the home button and auto-run Fully in Kiosk Mode on boot <input checked="" type="checkbox"/>
Disable Other Apps	Block apps not intentionally started by Fully <input checked="" type="checkbox"/>
Advanced Kiosk Protection	Enable advanced protection against starting other apps <input checked="" type="checkbox"/>
App Whitelist	Allow selected apps or activities to go to foreground, one package/component name per line, may use * wildcard
App Blacklist	Always block selected apps or activities, one package/component name per line, may use * wildcard
Single App Mode	
Auto-run an app with full kiosk mode protection	
Disable Notifications	Block all notifications from other apps <input type="checkbox"/>



Dessins mécaniques :

