




# ASLAN-W722C

## Fanless 21.5" Wide-Screen Industrial Panel PC with Intel® J1900 Quad-Core™ Processor

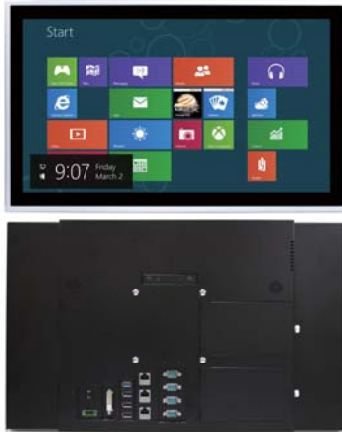

### Features

- 21.5" 1920 x 1080 FHD LCD display w/ LED backlight
- Flat panel with projected capacitive touchscreen
- Front panel compliant with IP65
- Anti-scratch surface: 7H hardness
- Vertical I/O design
- Easy maintenance design for CFast/HDD/SSD
- Serial ports (RS-232/485), RS-485 w/ auto-flow control
- Mini PCIe expansion slot support
- Fanless cooling system
- Cable-less design
- Low power consumption
- 2 x SMA antenna holes for optional WiFi Function
- 9~36V wide-range DC input

### System

CPU	Intel® J1900 Quad-Core™ Processor 2.0GHz
Memory	4GB DDR3L SO-DIMM RAM module installed 1 x DDR3L SO-DIMM Socket, supporting 1066/1333 MHz SDRAM up to 8GB
LAN	2 x Intel® I210AT GbE controllers 1 x Realtek® 8111E GbE controller
Watchdog Timer	1~255 levels reset

### Storage

Device	2 x outside-accessible 2.5" drive bay (default), or CFast slot (optional for OEM version)
--------	---

### Audio

Speaker	2 x 2W speakers (optional)
---------	----------------------------

### LCD Display

Size/Type	21.5" TFT LCD Panel
Max. Resolution	1920 x 1080, FHD
Max. Colors	16.2M
Luminance	250 cd/m <sup>2</sup>
Touch Screen	Projected capacitive touch panel
View Angle (U/D/R/L)	80°/80°/85°/85°

### Power System

Power Input	DC 9~36V
Power Consumption	Max. 29.8W (w/o I/O cards)

### Qualification

Certification	UL, CE, FCC Class A
---------------	---------------------

### Expansion

Expansion Bus	1 x Mini-card socket (Full Size)
---------------	----------------------------------

### External I/O

Serial Ports	2 x RS232 & 2 x RS-232/485 w/ auto flow control
USB Ports	1 x Type-A USB 3.0/2.0 port 3 x Type-A USB 2.0 port
LAN	3 x RJ-45 GbE ports
DVI	1 x DVI-I connector
WiFi	2 x SMA antenna holes for optional WiFi function

### Mechanical

Mounting Type	Panel Mounting and VESA-100 Mounting
Chassis	Panel-mounting chassis, aluminum front bezel and SECC steel chassis
Dimension (W x H x D)	536.00 x 332.00 x 48.40 mm (21.1" x 13.1" x 1.90")
Weight (Net)	7 kg (15.4 lb)

### Environmental

Operating Temp.	-20°C ~ 55°C (-4°F ~ 140°F)
Storage Temp.	-30°C ~ 70°C (-22°F ~ 158°F)
Operating Humidity	10 ~ 95% RH @ 55°C (non-condensing)
Vibration	5 ~ 500Hz, 0.5Grms Random (with CFast/SSD)
Shock	Operating 10G, 11ms Non-operating 30G, 11ms (with CFast/SSD)

### OS Support


W7 Pro / WS7E / W8.1 Industry / Windows 10 / Linux: Ubuntu

### Ordering Information

ASLAN -W722C-1900G4	21.5" Intel® J1900 Quad-Core™ Processor Wide-screen industrial panel PC with 4GB Memory
---------------------	---



# Dimensions

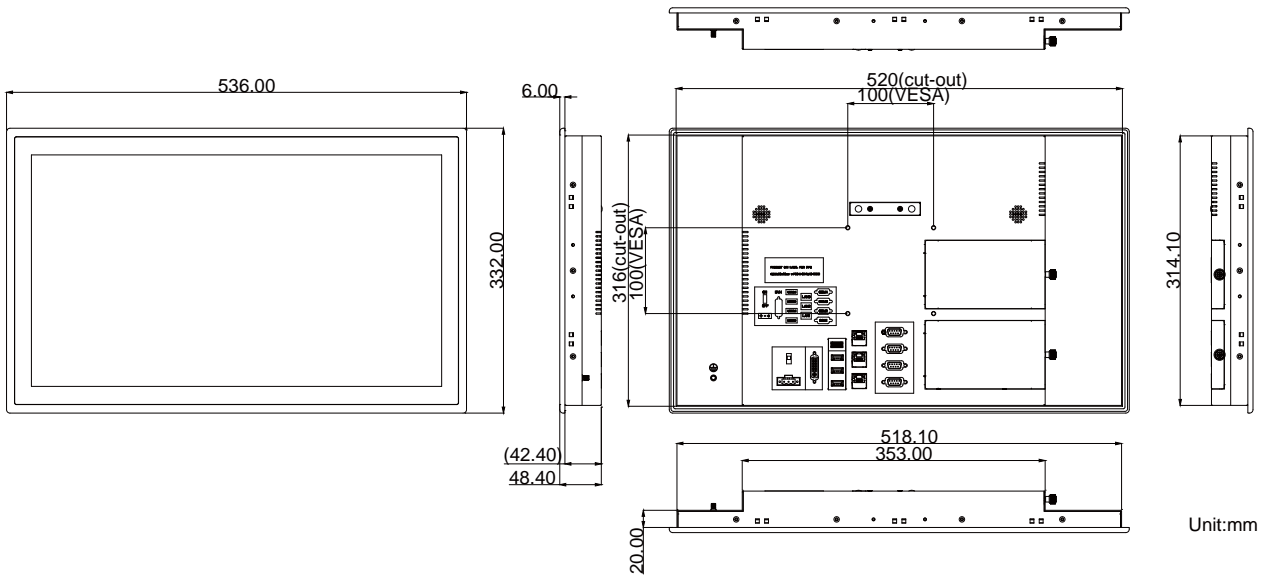

## Optional Accessories

PAC-P060W-02      12V/5A 60W AC/DC power adapter kit



## Optional Accessories (CTOS\* Kit)

150GB SSD      Intel® 2.5" 150GB SATAIII SSD kit



WiFi-AT2350      Atheros AR9462 WiFi module w/ 20cm & 30cm internal wiring



ANT-D11      1 x WiFi Dual-band 2.4G/5G antenna



ADK-712      LYNC-71x audio kit



*\*CTOS means Configure-to-Order Service.*