






Main Features:


-  19" Touch Monitor für 19" Racksystem mit nur 8HE
-  Resistive Touchsensor 5 wires mit USB Schnittstelle
-  Robustes Metallgehäuse

19" Rackmount Touch Monitor mit 8HE

Technische Daten

Housing	Material	Metall
	Color	white (RAL-7035S)
	Weight	Approx. 8 KG
	Dimensions	483 x 355 x 75mm (LxHxW)
Panel	Display Size	19" LCD-TFT (30,7cm)
	Max. Resolution / Ratio	1280x1024 (SXGA) / 4:3
	Brightness	350 nits
	Contrast Ratio	1000:1
	Backlight	LED
	Display Mode	Normally Withe TN
	Viewing angle, Vert. -/+	80 / 80
	Viewing Angle, Hor. -/+	85 / 85
	Response Time	16 mx
	Interface	Dual channel LVDS
	Temperature range	0 to +50°C
Input / Output	Video Input	VGA + DVI
	Video Input (as Option)	VGA + DVI + Composite + S-Video
	Audio Input (as Option)	Line-In
Power Specification	Power Source	12V DC IN, incl. external AC to DC Adapter 100~240 V AC
	Power Source (as Option)	24V DC IN (3-Pin Terminal Block with Phoenix Type)
	Power Consumption	27 W typical, normal operation
Touch/Glass Specification	Touchscreen	5-wire Resistive AMT Sensor by USB/RS232
	Glass (as Option)	Anti-Reflection Protection Glass
Options	USB Hub	2 x USB 2.0 / Typ A
	Print customized	Logo Print, RAL color Bezel
Order Information (P/N)	PRI-RKM.19RAU83000 - Rackmount Monitor 19" SXGA, 8HE, res. Touchsensor	

Mechanische Zeichnung

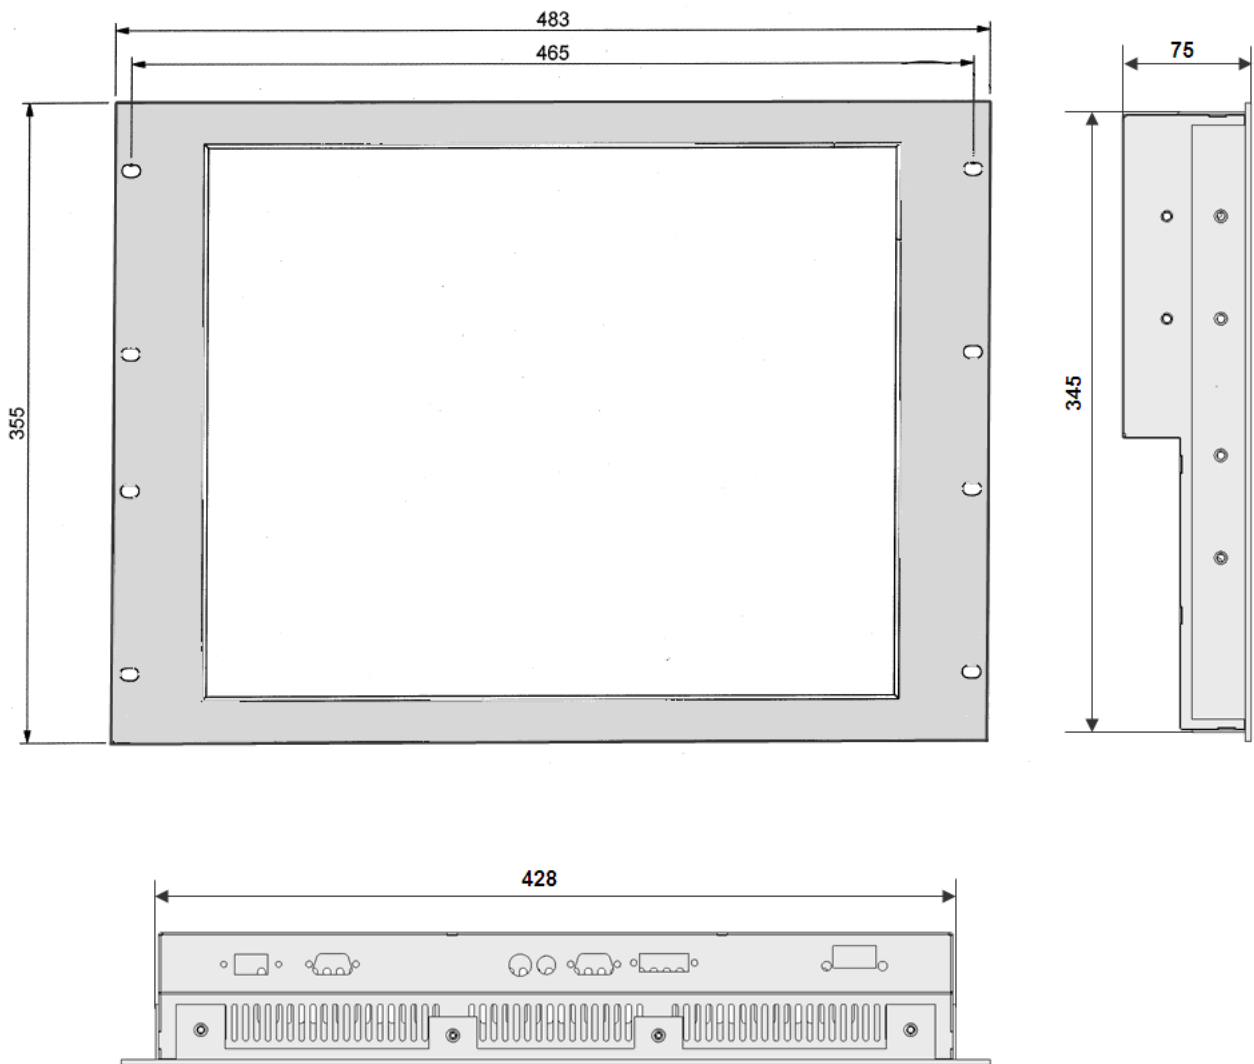

Rückseite



Hauptsitz
Primelco Visual Data AG
Neuhofstrasse 25
CH-6340 Baar
Telefon: +41 41 767 01 70
Fax: +41 41 767 01 79

Zweigniederlassung
Primelco Visual Data SA
Chemin de Chantemerle 14
CH-1010 Lausanne
Telefon: +41 21 651 60 50
Fax: +41 21 651 60 51

www.primelco.ch
<http://shop.primelco.ch>
visual@primelco.ch