

Open Frame LCD

Open Frame LCD



6.5"


Specifications

RoHS
COMPLIANT
2002/95/EC

| | |
|--------------------------------|---|
| Model Name | R06L200-OFA1 |
| Viewable Size Image | 6.5" |
| Active Display Area(mm) | 132.48(H)x99.36(V) |
| Pixel Pitch(mm) | 0.207(H)x0.207(V) |
| Number of Pixels | 640x480 |
| Contrast Ratio | 600:1(typ.) |
| Display Color | 262,144(6bit/colors) |
| Brightness(cd/m ²) | 700(typ.) |
| Viewing Angle(CR>=10) | -80~80(H);-70~70(V) |
| Synchronization Range | |
| Horizontal/Vertical | 31.5~37.5KHz/60~75Hz |
| Recommended Resolution | 640x480@60Hz, 75Hz |
| Signal Connector | 15 pin D-Sub |
| Power Source | 12V DC in, with External AC to DC Adapter (100~240V AC) |
| Power Consumption | 10W typical, normal operation |
| Power Management | VESA DPMS Compliant |
| Plug & Play | VESA DDC 1/2B |
| Optional Video Input | S-Video, Composite |
| Optional DVI Input | No |
| Optional Touch Screen | Resistive |

Remarks:R06L200 series= VGA input only
R06L230 series= VGA+Video Input

Mechanical Drawing

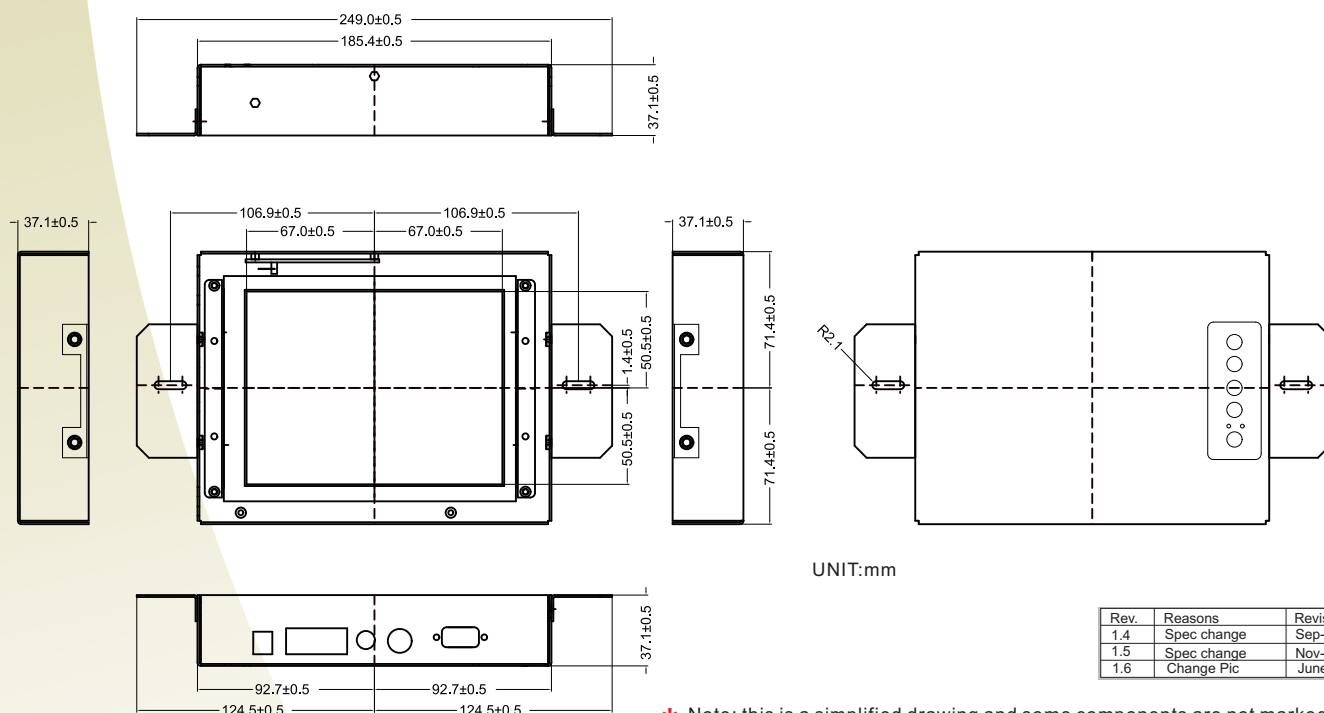

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.