


Stand Alone IP65 LCD

USB Type-C Display

12.1" (4:3) Specifications



| | |
|--------------------------------|---|
| Model Name | R12L100-GCM2-C |
| Panel Size | 12.1" |
| Active Display Area (mm) | 245.76(H) x 184.32(V) |
| Resolution | 1024x768 |
| Brightness | 500 (Typical) nits |
| Contrast Ratio | 700:1 (Typical) |
| Viewing Angle (CR>=10 L/R/U/D) | -80~80(H) ; -70~70(V) |
| Display Colors | 16.2M |
| Standard Input Signal | 1 x USB Type-C connector |
| Touch Screen | Projected Capacitive Multi-touch (Default) or Protection Glass (non-touch) (Optional) |
| Speakers | 2 x Speaker (Optional) |
| OSD | 5 Keys: -, +, Power, Esc, Enter |
| Power Source | USB Type-C Alt mode (5V/3A) |
| Power Consumption | 12W typical, Normal operation |
| Operating Temperature | 0~50°C |
| Storage Temperature | -10~60°C |
| Accessories | 1 x USB Type-C cable |
| IP Rating | Front IP65 |
| Certifications | CE, FCC |

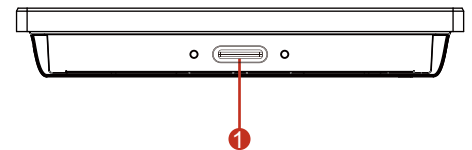

1. USB Type-C Connector
2. OSD Button

Mechanical Drawing

