


Chassis Monitor

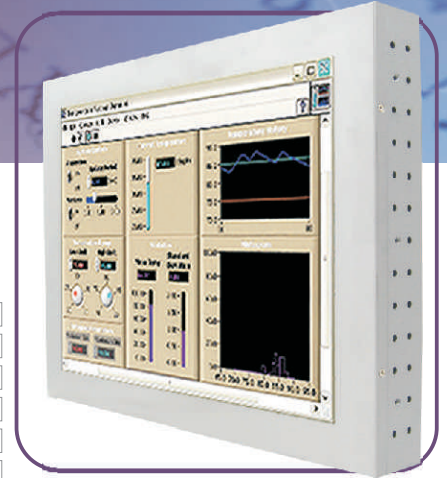

15"

Specifications


RoHS
COMPLIANT
2002/95/EC

Model Name	R15L100-CHA3
Viewable Size Image	15"
Active Display Area(mm)	304.128 (H) x 228.096 (V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	700:1 (typ.)
Display Color	16.2M
Brightness(cd/m ²)	400 (typ.)
Viewing Angle(CR>=10)	-80~80 (H); -80~60 (V)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	17 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW

Remarks:R15L100 = VGA input only

R15L110 = VGA + Video input

Mechanical Drawing

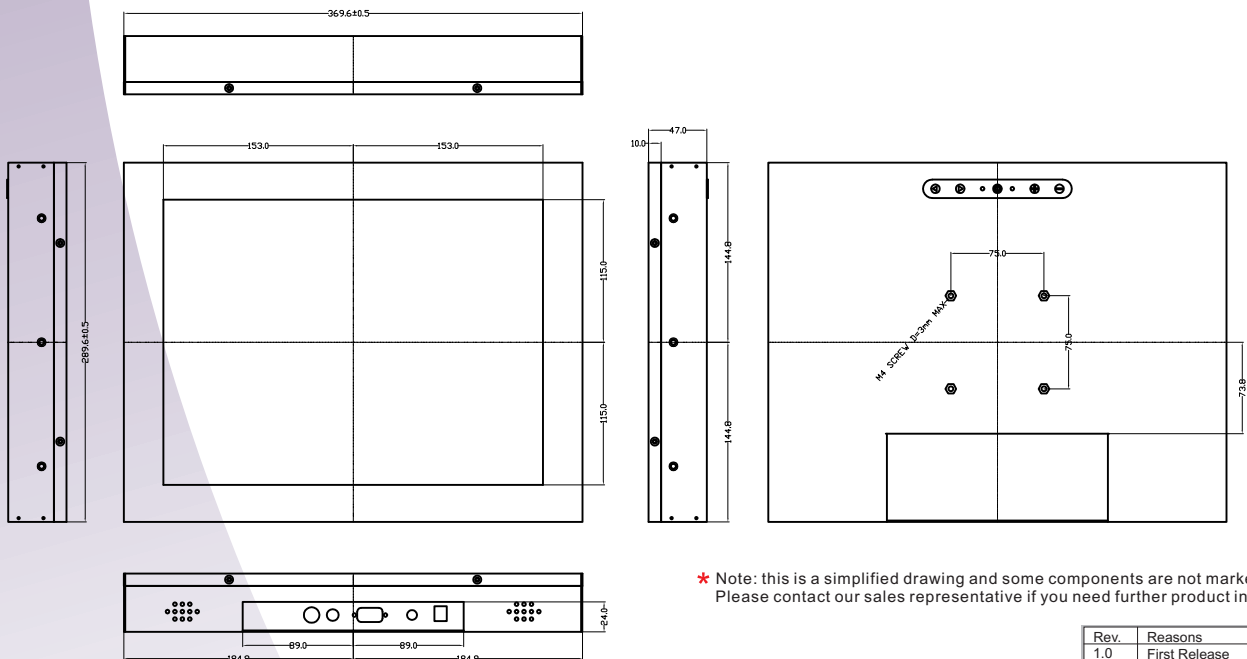

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First Release	Apr-25-13
1.1	Pic Change	Jun-04-13