

# Stand Alone LCD


## USB Type-C Display

15" (4:3)

### Specifications

RoHS  
COMPLIANT  
2011/65/EU


Model Name	R15L100-PCC3-C
Panel Size	15"
Active Display Area (mm)	304.128 (H) x 228.096 (V)
Resolution	1024 x 768
Contrast Ratio	700:1 (Typical)
Display Colors	16.2M
Brightness	300 nits (Typical)
Viewing Angle (CR>=10)	-80~80(H) ; -80~80 (V)
Standard Input Signal	USB Type-C Connector
Touch Screen	Projected Capacitive Multi-touch (Default) or Protection Glass (non-touch) (Optional)
Speakers	2 x 1W Speaker
OSD	7 Keys OSD Control
Power Source	USB Type-C Alt mode Power source needs to support 5V/3A
Power Consumption	12W typical , Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60 °C
Accessories	1 x USB Type-C cable(Optional)
Certifications	CE, FCC

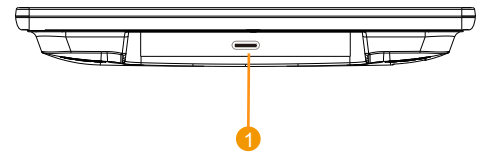

1. USB Type-C Connector
2. OSD Button

\*Outside dimension and I/O will be different from standard.

### Mechanical Drawing (without touch)

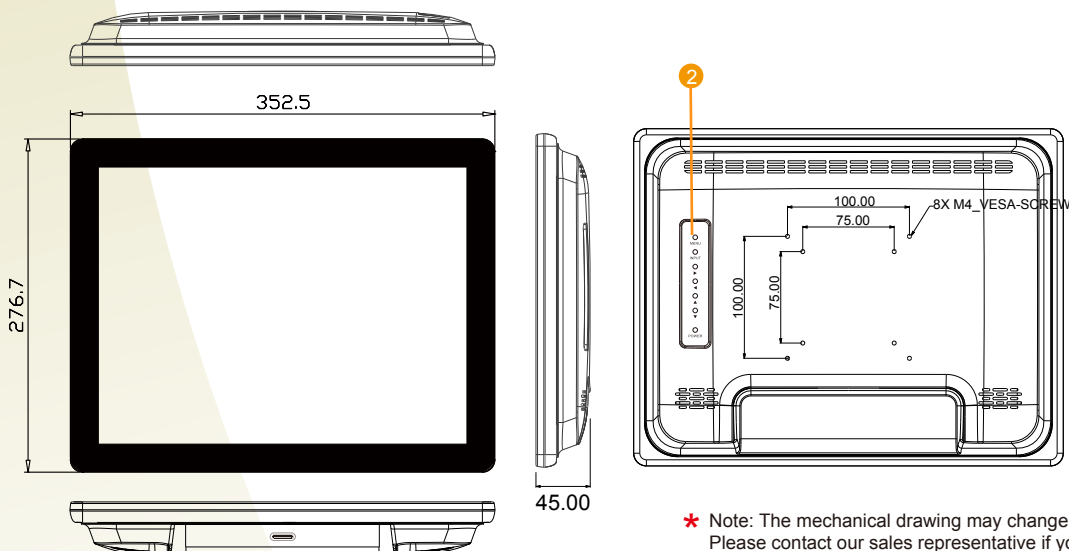

\* Note: The mechanical drawing may change when adding touch screen.  
Please contact our sales representative if you need further product information.