

## Panel Mount LCD



### 15"

#### Specifications




Model Name	R15L100-PMA1
Viewable Size Image	15"
Active Display Area(mm)	304.128(H) x 228.096(V)
Pixel Pitch(mm)	0.297(H) x 0.297(V)
Number of Pixels	1024 x 768
Contrast Ratio	700:1(typ.)
Display Color	16.2M
Brightness(cd/m <sup>2</sup> )	550(typ.)
Viewing Angle(CR>=10)	-80~80(H);-70~70(V)
Synchronization Range	
Horizontal/Vertical	31.5~60.0KHz/60~75Hz
Recommended Resolution	1024x768@60Hz,75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	20W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW

Remarks:R15L100 series= VGA input only

R15L110 series= VGA+Video Input

#### Mechanical Drawing

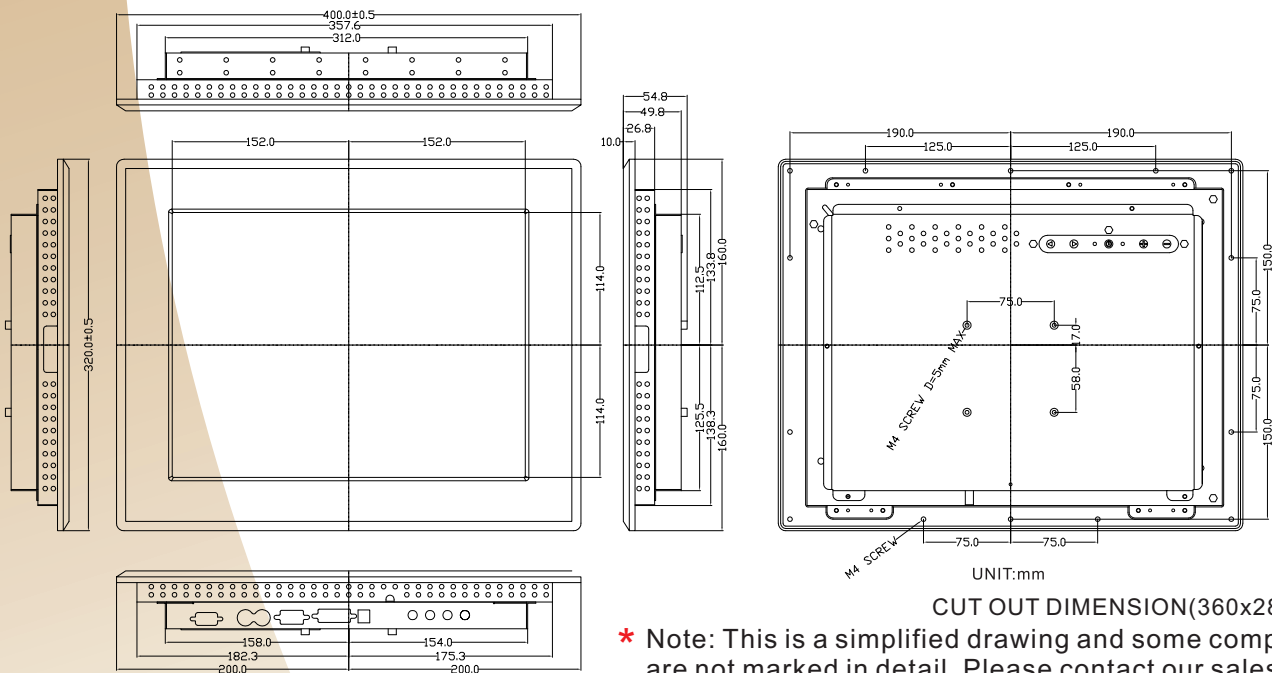

Rev.	Reasons	Revised Date
1.0	First Release	May-21-13
1.1	Spec Change	Jun-11-13
1.2	Pic Change	Nov-26-13