

Stand Alone IP65 LCD

USB Type-C Display

15" (4:3)

Specifications




Model Name	R15L600-PTC3-C
Panel Size	15"
Active Display Area (mm)	304.128 (H) x 228.096 (V)
Resolution	1024 x 768
Contrast Ratio	700:1 (Typical)
Display Colors	16.2M
Brightness	250 nits (Typical)
Viewing Angle (CR>=10)	-80~80(H) ; -80~80 (V)
Standard Input Signal	USB Type-C Connector
Touch Screen	Projected Capacitive Multi-touch (Default) or Protection Glass (non-touch) (Optional)
Speakers	2 x 1W Speaker (Optional)
OSD	7 Keys OSD Control
Power Source	USB Type-C Alt mode (5V/3A)
Power Consumption	12W typical , Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60 °C
Accessories	1 x USB Type-C cable
IP Rating	Front IP65
Certifications	CE, FCC

*Outside dimension and I/O will be different from standard.



1. USB Type-C Connector
2. OSD Button

Mechanical Drawing (without touch)

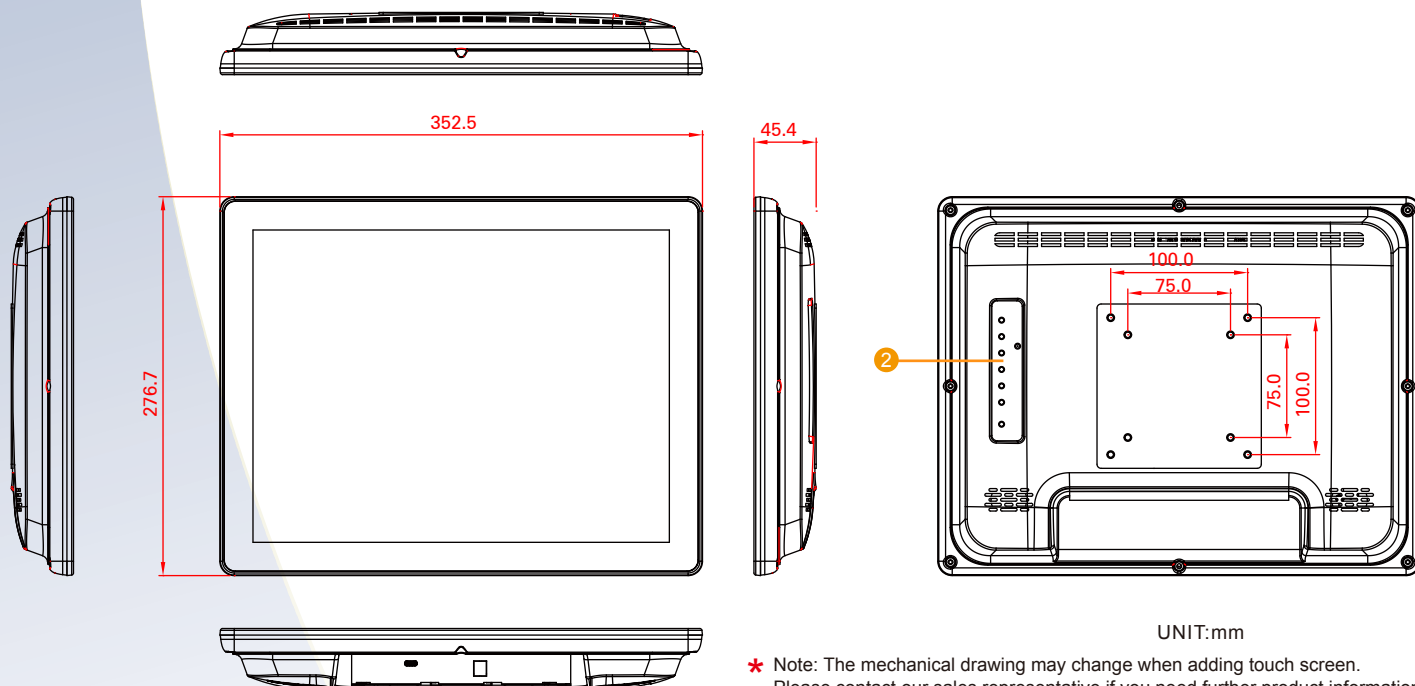

UNIT:mm

* Note: The mechanical drawing may change when adding touch screen. Please contact our sales representative if you need further product information.