

# Open Frame LCD


## USB Type-C Display

7" (16:10)

### Specifications

RoHS  
COMPLIANT  
2011/65/EU

Model Name	W07L100-POT1-C
Panel Size	7"
Active Display Area (mm)	153.6 (H) x 90 (V)
Resolution	1024 x 600
Brightness (cd/m <sup>2</sup> )	320 (Typical)
Contrast Ratio	500:1 (Typical)
Viewing Angle (CR>=10 L/R/U/D)	-75~75 (H) ; -75~70 (V)
Display Colors	16.7M(8 bits/color)
Standard Input Signal	USB Type-C Connector
Touch Screen	Projected Capacitive Touch(USB) Protection Glass (Optional)
Speakers (Optional)*	2 x Speaker
OSD	5 Keys: -, +, Power, Esc, Enter
Power Source	USB Type-C Alt mode Power source needs to support 5V/3A
Power Consumption	6W typical, Normal operation
Operating Temperature	0~50°C
Storage Temperature	-10~60°C
Accessories	1 x USB Type-C cable
Certifications	CE, FCC




1. USB Type-C Connector
2. OSD Button

\*Outside dimension and I/O will be different from standard.

\*Note: If your order does not include the Audio/Speakers option, the digital input will not have voice.

### Mechanical Drawing

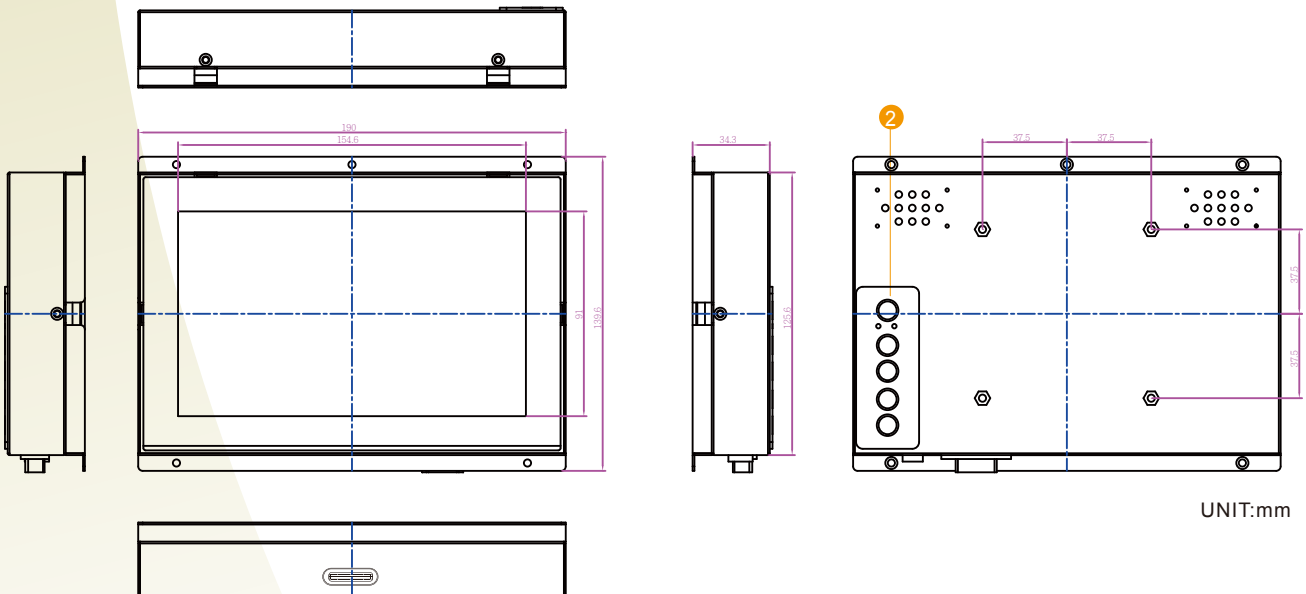

\* Note: The mechanical drawing may change when adding touch screen.  
Please contact our sales representative if you need further product information.