

Chassis Monitor

Chassis Monitor (LED Backlight)



32"(16:9)

Specifications




Model Name	W32L300-CHA3 / W32L340-CHA3
Viewable Size Image	32"(16:9)
Active Display Area(mm)	698.4 (H) x 392.85 (V)
Pixel Pitch(mm)	0.3638
Number of Pixels	1920x1080
Contrast Ratio	3000:1 (typ.)
Display Color	16.7M(8bit/colors)
Brightness(cd/m ²)	350(typ.)
Viewing Angle(CR>=10)	-89~89(H);-89~89(V)
Synchronization Range	
Horizontal/Vertical	47~63KHz / 60~73Hz
Recommended Resolution	1920x1080@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	DC 24V in, with External AC to DC Adapter (100~240V AC)
Power Consumption	75w typical,normal,operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video/ Composite
Optional DVI Input	Yes
Optional Touch Screen	SAW

W32L300 = VGA only/ VGA+DVI

W32L340 = (VGA only/ VGA+DVI) + VIDEO input

Mechanical Drawing (without touch)

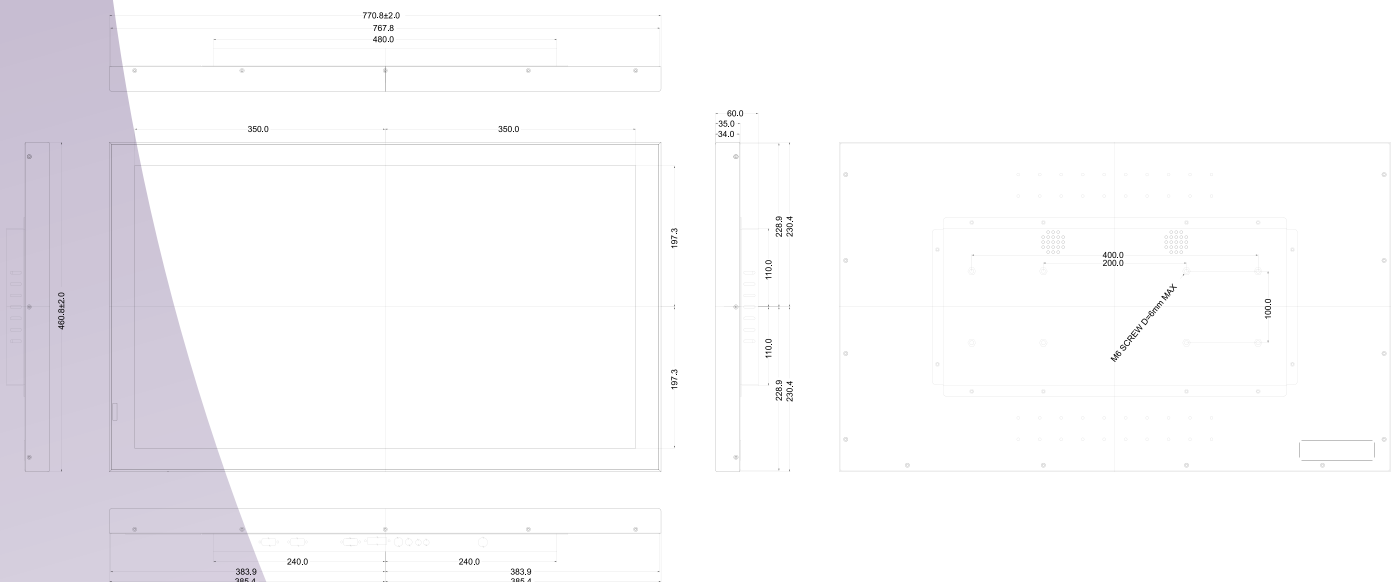


* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

Chassis Monitor

Chassis Monitor (LED Backlight)

Mechanical Drawing (with touch or glass)

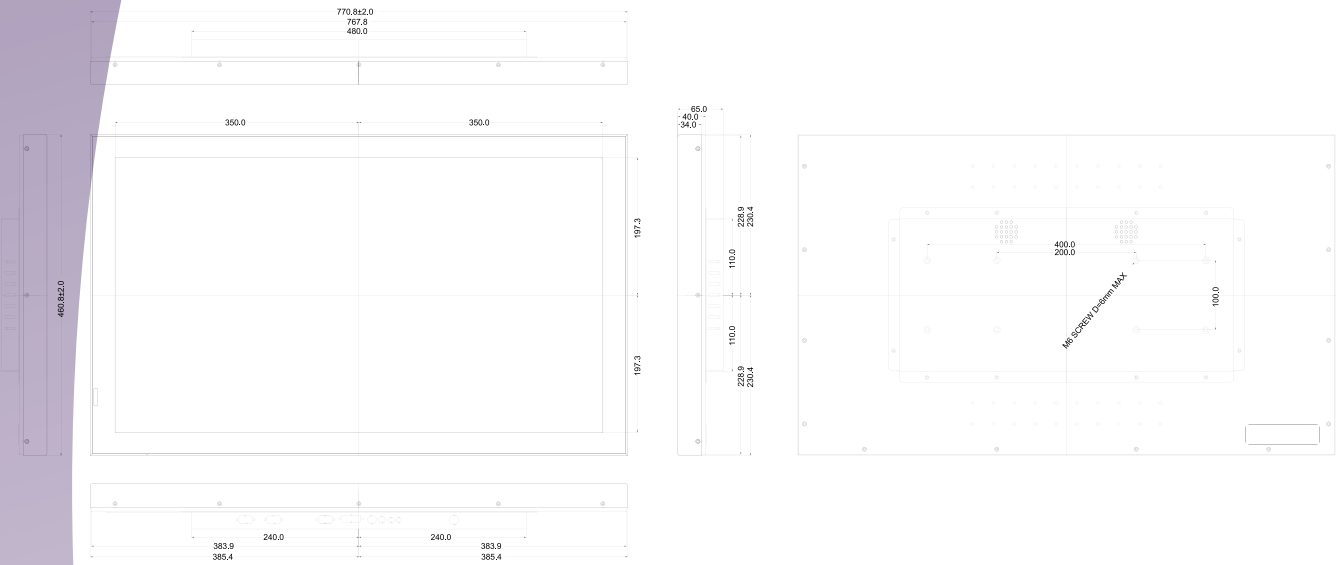

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.5	Drawing change	Nov-16-12
1.6	Drawing change	Dec-17-12
1.7	Spec change	Dec-22-12