

Full IP67 G-Win Panel PC

(Intel® Haswell Platform)

Flat Touch Panel Mount Panel PC




MODEL : R19IH3S-67FTE

Mechanical Design



Features

- Totally sealed Full IP67 Design
- High performance / low power Intel Haswell Core™ i5-4200U
- Anti-scratch 19-inch sunlight viewable 300 nits LCD panel (Optional for 800 nits High Brightness)
- -10 to 60°C operating temperature (optional built-in Intelligent Heater to avoid moisture)
- Fanless, streamlined enclosure for highly efficient heat dissipation
- Touch screen control button to enable/disable touch screen interface
- Rugged Front Anti-Impact Design (IEC60079-0 section 26.4.2)
- Front control membrane keys Lockable by software

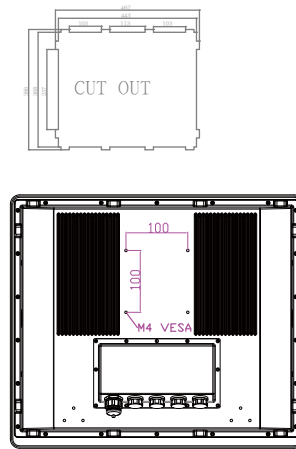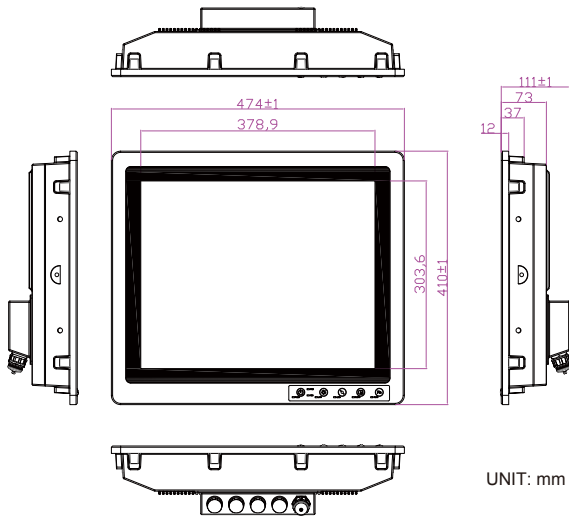

- 1.1 x IP67 USB 2.0 A Type with cover
- 2.1 x IP67 USB 2.0 connector
- 3.1 x IP67 LAN, with M16 connector
- 4.1 x IP67 RS232/422/485 with M16 connector
- 5.1 x IP67 9~36V DC, with M16 connector

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

System Specifications

TFT Characteristics :

- Resolutions : 1280 x 1024
- Brightness : 300nits (optional 800nit High Brightness)
- Contrast Ratio : 1000 : 1 (typ.)
- Viewing Angles : -85~85(H);-80~80(V)
- Max Colors : 16.7M
- Touch Screen : 5-Wire Resistive Touch

Mechanical Specification :

- Cooling System : Fanless design
- Dimension(W x H x D) : 474mm x 410mm x 143.5mm
- Gross Weight : 14.25 kg
- Net Weight : 10.28 kg

Power Specifications :

- Power Input : 9~36V DC input (isolation)

System Specifications :

- Processor : Intel® Core™ i5-4200U max. 2.6GHz
- BIOS : AMI BIOS
- System Chipset : Intel® HD graphics 4400
- Memory Slot : 1x DDR3L SO-DIMM 1600 MHz, 4GB default
- Main Storage : mSATA SSD 64GB, option up to 256GB
- Optional Second Storage : 2.5" SSD 64GB to 256GB

Environment Considerations :

- Operating Temperature : -10 deg.C to 60 deg.C (Optional Built-in Heater to avoid moisture)
- Operating Humidity : 5 to 95%

Full IP67 Connectors :

- 1 x IP67 grade USB A Type Connector with cover
- 4 x IP67 Connectors (USB/LAN/COM/Power)

Operating System (Optional) :

- Windows Embedded Standard 7
- Windows 7 PRO for Embedded System
- Windows Embedded 8 Standard
- Windows Embedded 8.1 Industrial

Standards and Certifications

- Safety : UL60950-1, CSA C22.2 No. 60950-1-07, EN60950-1, IEC60950-1
- CE
- FCC
- UL508
- Shock : MIL-STD-810G Method 516.6
- Drop : MIL-STD-810G Method 516.6
- Vibration : MIL-STD-810G Method 514.6

Accessories :

- 1 x Driver & Manual CD
- 1 x AC to DC 24V 150W Power Adapter
- 4 x IP64 External Cables (USB / LAN / COM / Power)

