


W22IK7T-OFA3 21.5" Panel PC (Intel 7th Generation Core i3/i5/i7 Processor)

Mechanical Design




Open Frame

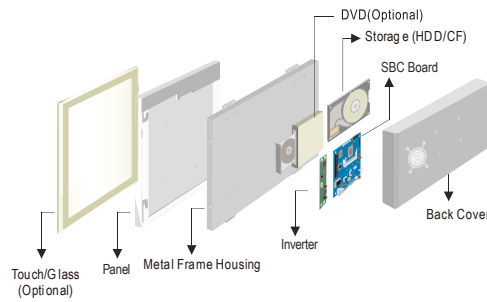


Mechanical design

Features:


- 21.5" 1920 x 1080 Resolution
- Intel 7th Generation Core i3/i5/i7 processor (KabyLake)
- Flexible storage devices, one 2.5-inch HDD and one SSD
- Multiple I/Os, Two Serial Ports and Four USB 3.0 Ports
- 12V DC Power input
- DP Support 4096 x 2304@60Hz
- HDMI Support 4096 x 2304@24Hz

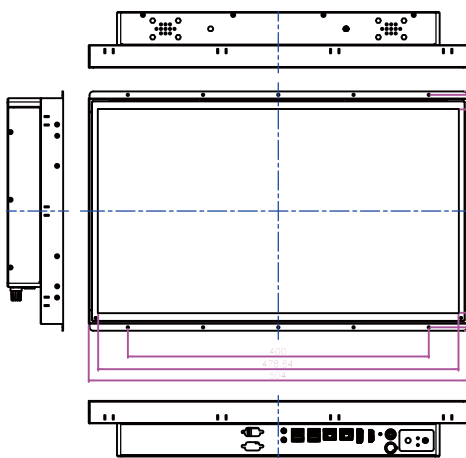

Dimensions

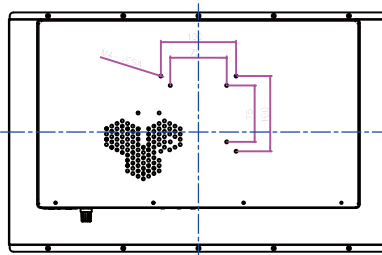

Fully Integrated I/O

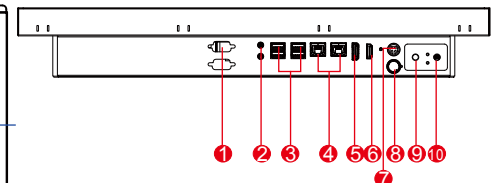

1. 2 x RS-232/422/485 Conn.
2. Mic In / Line Out
3. 4 x USB 3.0
4. 2 x LAN
5. DP 1.2
6. HDMI 1.4
7. 12V DC IN
8. Brightness Adjustment Knob
9. Power On Button
10. Power Reset Button

- * Measurements shown in mm
- * All Dimensions are ±
- * Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Specifications

System	
Processor	: Intel® Core™ i7-7700T Processor, 2.9 GHz Intel® Core™ i5-7500T Processor, 2.7 GHz Intel® Core™ i3-7100T Processor, 3.4 GHz
System Chipset	: Intel® 8 series Chipset(C236)
System Memory	: 2 x SODIMM, Max 32GB DDR4 2400 MHz, default 4GB
Storage	: 1 x M.2 SSD, Max 256GB 1 x 2.5" 500GB HDD (default)
LAN	: Intel® Ethernet Controller I211-AT + Intel® Gigabit Ethernet PHY I219-LM
Audio Codec	: Realtek ALC283 HD Audio Codec

Input / Output	
Serial Port	: 2 x RS232/422/485(default RS232)
Ethernet	: 2 x RJ45-10/100/1000 Mbps
USB Port	: 4 x USB 3.0
DP Port	: 1 x DP 1.2
HDMI Port	: 1 x HDMI 1.4
Audio	: Mic in, Line out

Power Specifications	
Power Input	: 12V DC IN (Lockable Power Jack)
Power Consumption	: 96W (typ.)(Max.backlight & high CPU load)

Accessories	
External Adapter	: 110~240V Ac-in Power Adapter

Panel Spec	
Size/Type	: 21.5" TFT
Resolution	:1920X1080
Brightness	:250 cd/m ² (typ.)
Contrast Ratio	:3000:1(typ.)
Viewing Angles	:-89~89 (H) ; -89~89 (V)
Max Colors	:16.7M (8bits/colors)

Environment Considerations	
Operating Temperature	: 0° C to 50° C
Operating Humidity	: 10% to 90% (non condensing)

Security Support	
• Trusted Platform Module (TPM 2.0)	

Order Options	
Mechanical :Open Frame	Storage :2.5" HDD/ M.2 SSD
Touch :5-Wires Resistive(Default)	RAM :SODIMM DDR4
Panel : 1000cd/m ² (Optional)	OS : Windows 10 IoT Enterprise
	Power : 9~36V DC in(Optional)

Expansion Slot	
• 2 x M.2 (1 for WiFi, 1 for SSD), 1 x PCIe16	
*Customized housing required if you need to have the PCIe expansion	