


# ITX-i67M0

2<sup>nd</sup> / 3<sup>rd</sup> Generation Intel® Core™ Processor Embedded Mini-ITX Motherboard

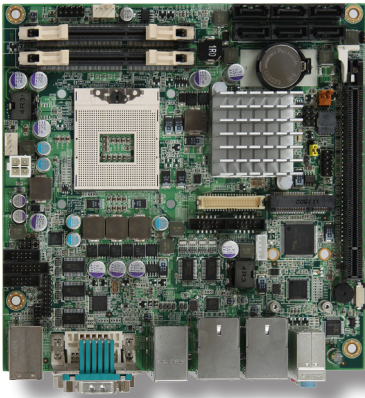

## Features

- 2<sup>nd</sup>/3<sup>rd</sup> Generation Intel® Core™ Processor supported
- Dual Gigabit Ethernet Ports
- Dual Independent Displays supported
- Highly Integrated Video Function
- RS-485 Auto-flow Control supported
- Intel® AMT 7.0 supported
- RAID 0, 1, 5, 10 supported
- **Extended Operating Temp.: -20 ~ 70°C**

## System

CPU	2 <sup>nd</sup> / 3 <sup>rd</sup> Generation Intel® Core™ i7/i5/i3/ Celeron® Processor in rPGA988
Memory	2 x 204-pin DDR3 SO-DIMM sockets, supporting 1066/1333MHz SDRAM up to 8GB
Chipset	Intel® PCH QM67
BIOS	AMI BIOS
Watchdog Timer	1~255 levels reset

## I/O

Super I/O	Fintek F71869ED
Serial Port	5 x RS-232 ports 1 x RS-232/422/485 selectable port w/ RS-485 auto-flow control
USB Port	12 x USB 2.0 ports
KB/MS	1 x 6-pin mini-DIN for keyboard and mouse via Y-Cable
Digital I/O	16-bit programmable digital input/output
Expansion Bus	1 x PCIe x16 slot 1 x Mini-card socket
Storage	2 x Serial ATA 3.0 ports with 600MB/s HDD transfer rate 4 x Serial ATA 2.0 ports with 300MB/s HDD transfer rate RAID 0, 1, 5, 10 supported
Ethernet Chipset	1 x Intel® 82579LM PCIe GbE PHY w/ iAMT 1 x Intel® 82583V GbE Controller
Audio	Realtek ALC886 HD Audio Codec, Mic-in/Line-in/Line-out

## Display

Graphic Chipset	Integrated Intel® HD Graphics 3000
Graphic Interface	1 x DVI-I connector, supporting either Analog RGB or DVI, resolution up to 2048 x 1536 for Analog RGB or 1920 x 1200 for TMDS LCD that supports Dual Channels 24-bit LVDS, resolution up to 1600 x 1200


## Recommended CPU List:

3 <sup>rd</sup> Generation Intel® Core™ i7-3610QE quad-core 2.3GHz i5-3610ME quad-core 2.7GHz i3-3120ME dual-core 2.4GHz	2 <sup>nd</sup> Generation Intel® Core™ i7-2710QE quad-core 2.1GHz i5-2510E quad-core 2.5GHz i3-2330E dual-core 2.2GHz Intel® Celeron® Processor B810 1.6GHz
---	--


## Mechanical & Environmental

Power Requirement	DC12V input only
Power Consumption	3.5A@+12V with i7-2710QE (Typical)
Operating Temp.	-20 ~ 70°C (-4 ~ 158°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Dimensions (L x W)	170 x 170 mm (6.7" x 6.7")


## Dimensions

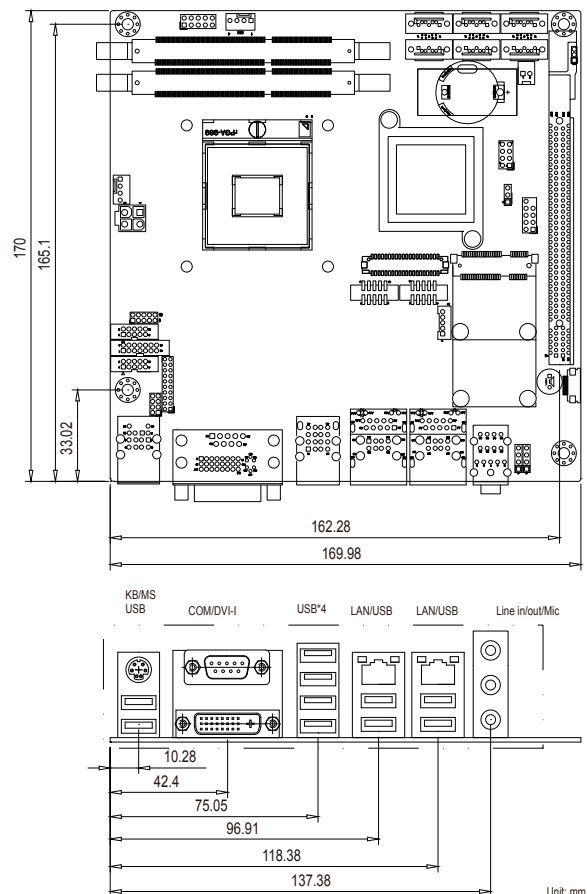

All specifications are subject to change without notice.



## Block Diagram

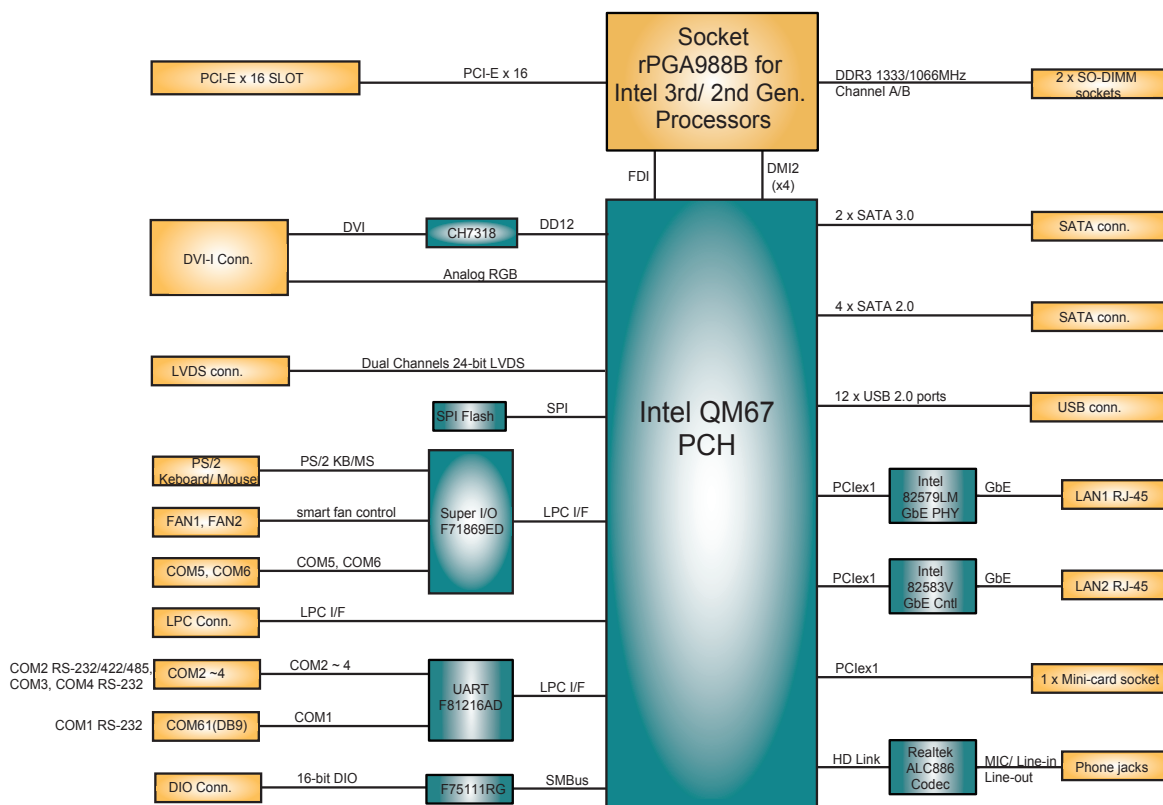

### Ordering Information

ITX-i67M0	2nd/3rd Generation Intel® Core™ i7/i5/i3, Celeron® Processor with rPGA988 socket embedded Mini-ITX motherboard
-----------	--

### Optional Accessories

CPF-67M0-C1	CPU Cooling Fan for rPGA988 CPU
-------------	---------------------------------

CBK-11-67M0-00	Cable kit 2 x Two-port COM cables 1 x COM Flat cable 1 x USB cable 2 x SATA cables 1 x SATA power cable
----------------	--