

# IEM-15

15.6 inches P-CAP Touch Screen Monitor




**TES** 


# IEM-15

Slim Bezel

11.95 mm

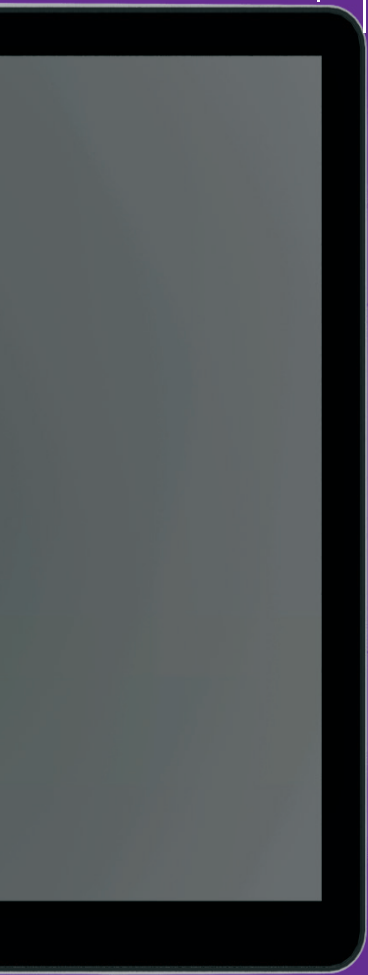


15.6" Full Flat Touch Screen LCD with  
7H Hardness Durable Glass

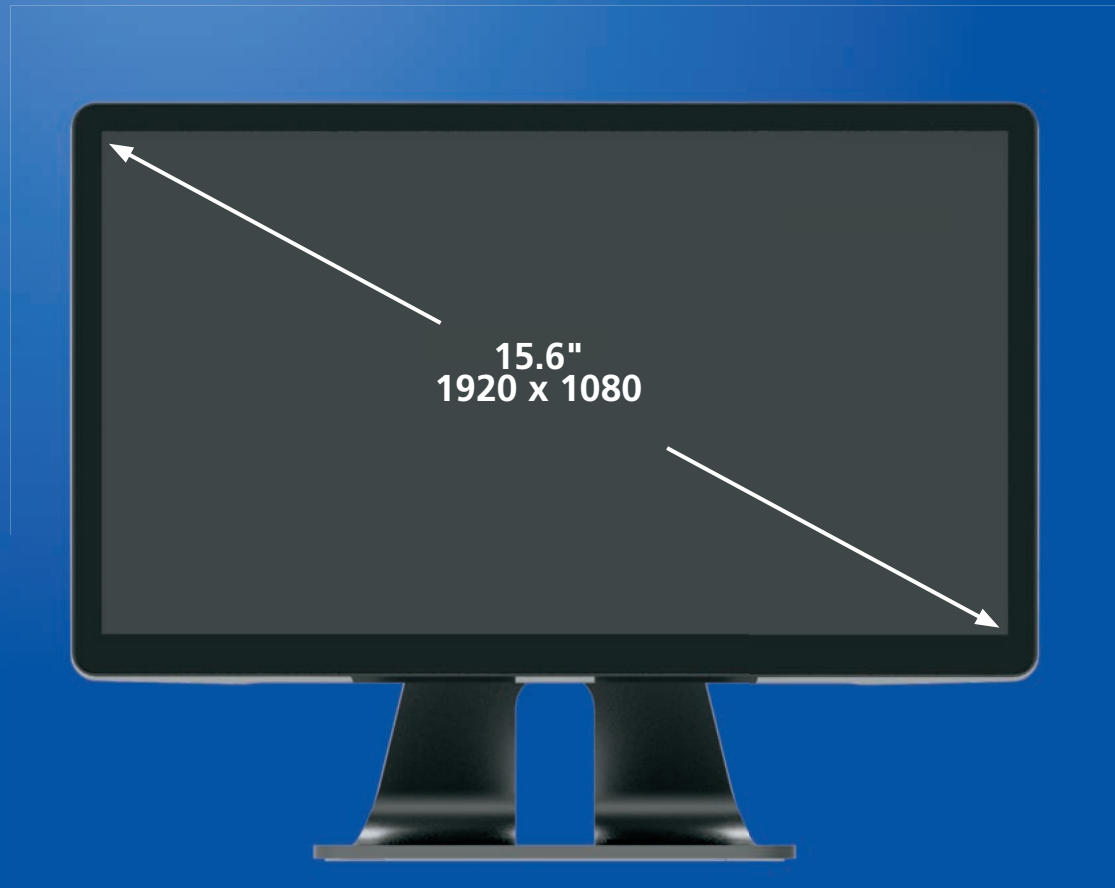

# Features

Stylish Compact Stand with Cable Access for Easy Installation Especially in Limited Area

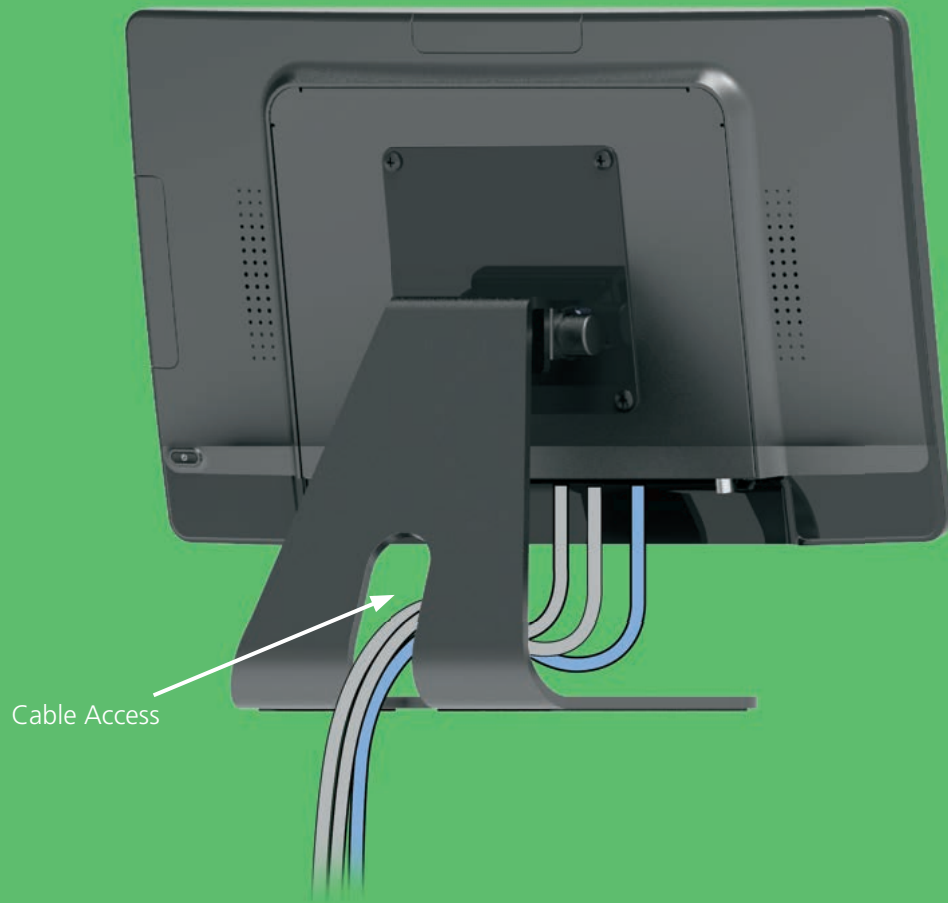


100 x 100 mm VESA Mount



# Specification

IEM-15	
Size	15.6" TFT LCD
Maximum Resolution	1920 x 1080
Contrast Ratio	1000:1
Brightness	450 nits (No Touch), 405 nits (P-CAP)
View Angle	H:178°, V:178°
Touch LCD Display	
Touch Type	Projected Capacitive
Touch Points	10 points Touch
Touch Screen Interface	USB-HID
Display Surface	7H Hardness durable glass
I/O Port	
RJ-11	1 x RJ11 (for Remote Key)
USB Port	1 x USB Type C (Alt Mode for DP video support)
Video Port	1 x VGA, 1 x DP, 1 x HDMI (up to 1920 x 1080 @60Hz)
Audio Port	1 x Audio-Input (3.5 mm Mini-Jack)
Power Input	1 x DC In 12V Jack Power Input
Physical Properties	
Speaker	2 x 2W Stereo
Power Supply	50W (12VDC/4.16A) External AC Power Adaptor (100VAC ~240VAC, 50/60Hz)
Housing Color	Black
Material	Plastic, Glass, SECC Metal
Dimensions (W x H x D) mm	369.1 x 223.7 x 27.2 mm (monitor only) 369.1 x 290.5 x 169.4 mm (with stand)
Net Weight (kg)	1.805 kg (monitor only) 3.805 kg (with stand)
Gross Weight (kg)	2.80 kg (monitor only) 5.78 kg (with stand)
Carton (W x H x D) mm	455 x 315 x 150 mm (monitor only) 470 x 380 x 340 mm (with stand)
VESA	100 x 100 mm
Safety	
Certifications	CE, FCC, LVD, RoHS
Environment	
Operating Temperature / Operating Humidity	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature / Storage Humidity	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing

# Interfaces

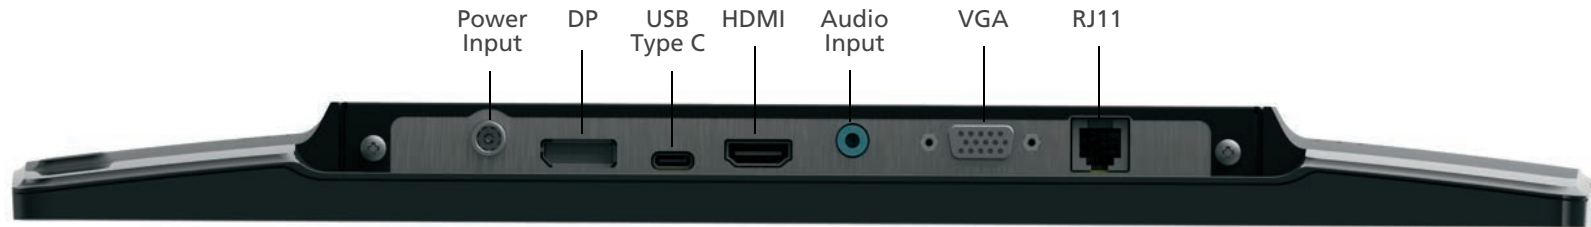

# Dimensions

IEM-15

