

R17IB7T-PMM1

17" Intel® Celeron® Bay Trail-M N2930 Panel Mount Panel PC



KEY FEATURES

- 1 x SATA II, 3 x COM, 3 x USB 2.0, 1 x USB 3.0, 2 x Mini PCIe slot
- 17" TFT SXGA LCD
- Integrated Dual Broadcom I210AT GbE Controller
- Integrated VGA, 24 bit Dual-channel LVDS, DVI
- Intel® Celeron® Bay Trail-M N2930 1.83 GHz Processor
- SO-DIMM DDR3L 1600, max. 8 GB




SPECIFICATIONS

Display	
Resolution	1280x1024
Contrast Ratio	1000:1
View Angles	85,85,80,80
Size	17.0 inches
Panel Brightness	350 nits
Touch / Glass	Resistive Touch Screen Protection Glass Without Touch Function (Optional)
System Specification	
Processor	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)
Storage	1 x mSATA SSD 64GB mSATA SSD up to 512GB (Optional) 1 x SATA II for 2.5" HDD (Optional)
Security	TPM 1.2
Memory	2 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
WLAN	802.11 a/b/g/n/ac (Optional)
Ethernet controller	2 x Intel® Ethernet Controller I210-AT
Operating System	Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional)
Mechanical	
Dimension	440 x 360 x 90 mm
Mounting	Panel mount VESA Mount
Enclosure	Metal Housing
Cooling System	Fanless design
Cut out	394x314mm
Environment	
Operating Humidity	10% to 90% (non-condensing)
Operating Temperature	0~50°C
Storage Temperature	-10~60°C
Certification	
Certification	CE, FCC
IO Ports	
USB Port	1 x USB3.0 (Type-A) 3 x USB2.0 (Type-A)
Serial Port	1 x RS232/422/485 (Default RS232) 2 x RS232 1 x RS232 (Optional)
Video	1 x VGA
Audio	Mic in Line in

Expansion Port	2 x mPCIe slot	LAN	Line out 2 x Giga LAN RJ45 Connector
Indicator	1 x LED Indicator for power 1 x LED Indicator for storage	Brightness Knob	1 x Brightness Adjustment Knob
PS/2	2 x PS/2	mini PCIe	3 x Mini PCIE
Control			
Button	1 x Power Button 1 x Reset Button		
Accessory			
Accessory	100~240V AC to DC Adapter Power Cord Driver CD & Manual VESA screws Mounting clips		
Power			
Power Rating	12V DC	Adapter	12V 84W

DIMENSIONS UNIT:MM

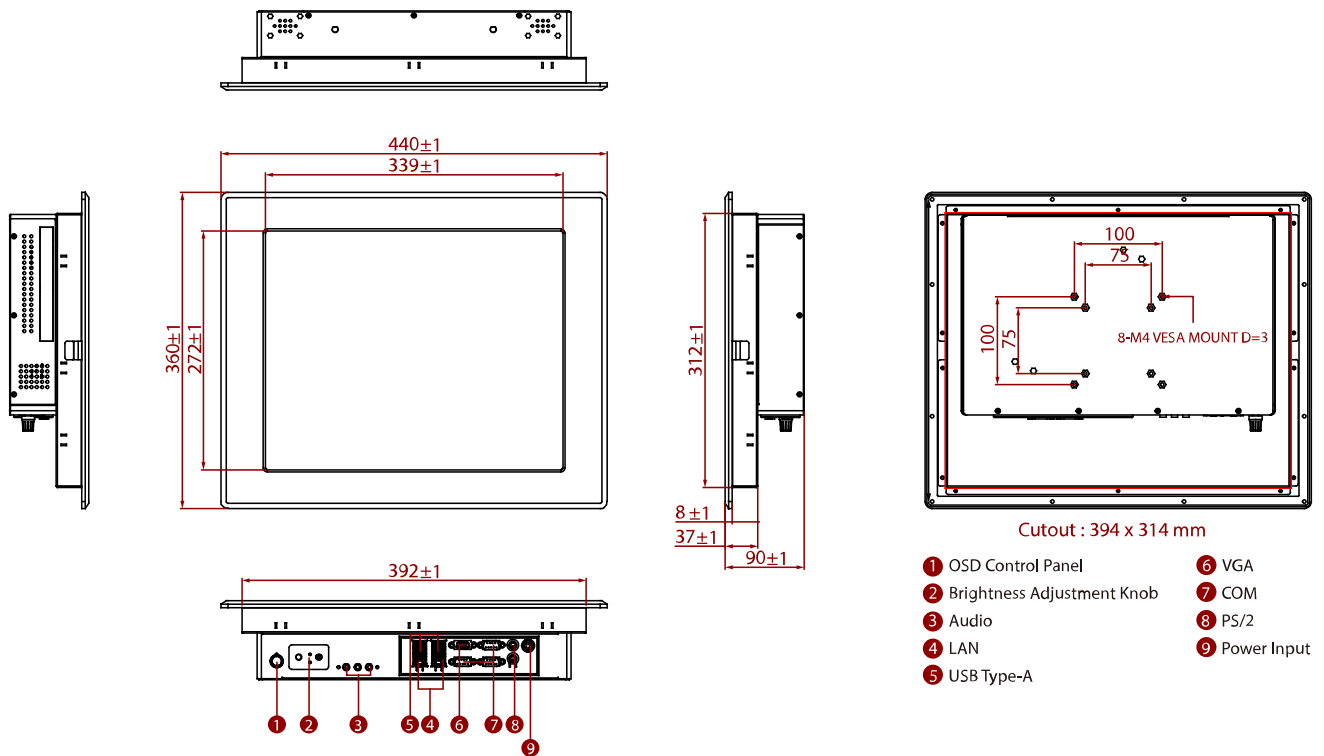

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.