

Chassis Monitor



10.4"

Specifications


RoHS
COMPLIANT
2002/95/EC

Model Name	R10L100-CHA1/R10L110-CHA1(LED)
Viewable Size Image	10.4"
Active Display Area(mm)	211.2(H)x158.4(V)
Pixel Pitch(mm)	0.264 (H) x 0.264 (V)
Number of Pixels	800x600
Contrast Ratio	500:1 (typ.)
Display Color	16.2M (8bits/color)
Brightness(cd/m ²)	400 (typ.)
Viewing Angle(CR>=10)	-80~80 (H); -60~80 (V)
Synchronization Range	
Horizontal/Vertical	31.5~46.9KHz / 60~75Hz
Recommended Resolution	800x600@60Hz, 75Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC)
Power Consumption	15 W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	No
Optional Touch Screen	Resistive, SAW, IR

Remarks:R10L100 = VGA input only

R10L110 = VGA + Video input

Mechanical Drawing

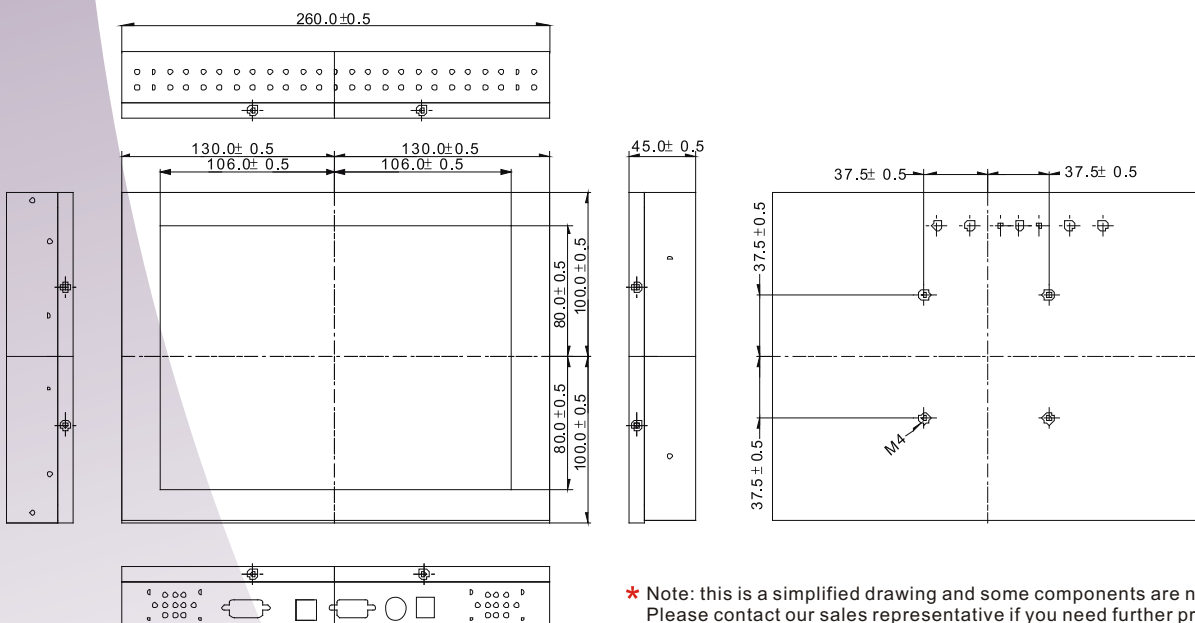

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	Nov-30-09
1.1	Modelname change	Oct-29-10
1.2	Spec change	Nov-14-12